

RSA

and Number Theory

1%

What is public key cryptography? Why is there a need?

- Asymmetric vs. Symmetric
- Problems solved by public key
 - Shared secret not needed
 - Authentication
- Trapdoor one-way function
 - Factoring integers
 - Discrete logs
- Slow, power hungry

1%

Public Key Cryptographic Use

- Secure RPC
- SSL
- Cisco encrypting routers

1%

Public Key Cryptosystem Security

- can never provide unconditional security
- Try all possible plaintexts since public key is known
- When you match with the ciphertext → corresponding plaintext is known

1%

Where did public key cryptography come from?

- Diffie and Hellman
 - Credited with invention (circa 1976)
 - One year later, RSA is invented
 - April 2002, ACM communications
- 1973 James Ellis (British Gov't)
 - "The possibility of non-secret encryption"
 - NSA claims


1%

Key distribution

- Alice and Bob need to talk
- Insecure channel of communication
- First, set up our field that our numbers will operate within:
 - p , a large prime (sets up something called our field)
 - α is called a primitive root of F_p

1%

Alice and Bob obtain a private key using public keys

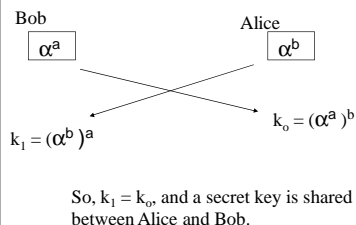

What does the adversary know, and what can he do?

- Knows α^a , α^b , α , and p
- So we want to find the key, k
 - $k = \alpha^{ab}$
 - This is believed to be hard.
- If one knows how to compute discrete logs efficiently, then one can break this scheme (and other schemes based on public key cryptography)

trapdoor one-way function

- one-way function
 - easy to compute but hard to invert
 - Example:
 - Given: $31 = 2^b \bmod 127$, Find b ? (DL problem)
- trapdoor function
 - Is one-way function but easy to invert with extra secret knowledge or private info (knowledge of a certain trapdoor)

Overview

- RSA
 - Rivest, Shamir, Adleman, 1977
- Z_n
 - Modular operations (the expensive part)
 - A sender looks up the public key of the receiver, and encrypts the message with that key
 - The receiver decrypts the message with his private key
 - Although, public key is public information, private key is secret but related to the public key in a special way

Overview of Public Key Cryptosystem (PKC)

- Integer factorization problems (RSA)
- Discrete Logarithm problems (Diffie-Hellman, ElGamal)
- Elliptic Curve Cryptosystems

Algorithm family	Bit length
Integer Factorization (IF)	1024
Discrete Logarithm (DL)	1024
Elliptic curves (EC)	160
Block cipher	80

Security levels of PKCs

PKC Standards

- **IEEE P1363**: Comprehensive standard of PKC. Collection of IF, DL and EC, in particular:
 - Key establishment algorithms
 - Key transport algorithms
 - Digital Signature algorithms
- **PKCS** (Public key cryptography standard) by RSA
 - PKCS #1: RSA Cryptography Standard
 - PKCS #3: Diffie-Hellman key agreement Standard
 - PKCS #13: Elliptic Curve Cryptography Standard

PKC Standards

- ANSI Banking Standards (ANSI=American National Standards Institute)
 - Elliptic curve key agreement and transport protocols X9.63
 - Elliptic curve digital signature algorithm (ECDSA) X9.62
 - Key management using Diffie-Hellman X9.42
 - Hash algorithms for RSA X9.32-2
 - RSA signature algorithm X9.31-1
 - Hash algorithm for RSA X9.30-2
 - Digital Signature Algorithm (DSA) X9.30-1
- US Government Standards
 - Entity authentication FIPS ????
 - Digital Signature Standard (DSA) FIPS 186
 - Secure hash standard (SHA-1) FIPS 180-1

11%

The RSA cryptosystem

- First published:
 - Scientific American, Aug. 1977.
(after some censorship entanglements)
- Currently the "work horse" of Internet security:
 - Most Public Key Infrastructure (PKI) products.
 - SSL/TLS: Certificates and key-exchange.
 - Secure e-mail: PGP, Outlook, ...

11%

RSA

- Most popular PKC
- 1977 Invented at MIT by Rivest, Shamir, Adleman
- Based on *Integer Factorization* problem
- Each user has public and private key pair.
- Its patent expired in 2000.

11%

RSA

- Choose: $p, q \in$ positive distinct large primes
- Compute: $n = p \times q$
- n = encryption/decryption modulus \rightarrow computations in Z_n
- Compute: $\phi(n) = (p-1)(q-1)$
- Choose randomly: $e \in Z_{\phi(n)}^*$
- $\rightarrow \gcd(\phi(n), e) = 1$, (e has an inverse mod $\phi(n)$)
- Find $d = e^{-1} = ?? \bmod \phi(n)$
- Encryption: $c = x^e \bmod n$ where $x < n$
- Decryption: $x = c^d \bmod n$
- n, e are made public but p, q, d are secret

11%

The RSA trapdoor 1-to-1 function

- Parameters: $\begin{cases} N=pq, N=1024 \text{ bits}, p, q=512 \text{ bits}, \\ e - \text{ encryption exponent}, \gcd(e, \phi(N)) = 1. \end{cases}$
- 1-to-1 function: $\text{RSA}(M) = M^e \pmod{N}$ where $M \in Z_N^*$
- Trapdoor: d - decryption exponent.
Where $e \cdot d = 1 \pmod{\phi(N)}$
- Inversion: $\text{RSA}(M)^d = M^{ed} = M^{k\phi(N)+1} = M \pmod{N}$
- (n, e, t, ϵ) -RSA Assumption: For any t -time alg. A :
 $\Pr[A(N, e, x) = x^{1/e} \pmod{N} : \begin{matrix} p, q \leftarrow \mathbb{R} \text{ } n\text{-bit primes}, \\ N \leftarrow pq, x \leftarrow \mathbb{R} Z_N^* \end{matrix}] < \epsilon$

11%

Example: RSA encryption & decryption

- | | |
|--|--------------------------------------|
| Bob | Alice |
| (1) chooses $p = 3, q = 11$ | |
| (2) $n = pq = 33$ | |
| (3) $\phi(n) = (p-1)(q-1) = 20$ | |
| (4) Chooses $e = 3; \gcd(3, 20) = 1$ | |
| (5) Computes $d \equiv e^{-1} \bmod \phi(n)$
$d \equiv 7$ | |
| (6) Sends (e, n) to Alice | |
| | (1) Message: $x = 4$ |
| | (2) $y \equiv x^e \bmod n \equiv 31$ |
| | (3) Sends y to Bob |
| (7) $x \equiv y^d \bmod n \equiv 4$ | |

11%

Example: RSA digital signature

- | | |
|---|---|
| <p>Bob</p> <ol style="list-style-type: none"> (1) chooses $p = 3, q = 11$ (2) $n = pq = 33$ (3) $\phi(n) = (p-1)(q-1) = 20$ (4) Chooses $e = 3$; $\gcd(3, 20) = 1$ (5) Computes $d \propto e^{-1} \bmod \phi(n)$
$d \propto 7$ (6) Sends (e, n) to Alice | <p>Alice</p> <ol style="list-style-type: none"> (1) Message to be signed: $x = 4$ (2) $y \equiv x^e \bmod n \equiv 31$ (3) Sends x & y to Bob |
|---|---|
- (7) Compute $y^d \bmod n \equiv 4$
 (8) If $x \equiv y^d \bmod n$ (signature verified)

RSA Keys generation
Same as RSA encryption & decryption

11%

RSA keys Example (simple)

- $p = 11, q = 5 \rightarrow n = 55$
- $\phi(n) = 10 \times 4 = 40 = 2^3 \times 5$
- an integer e can be used as an encryption exponent if and only if e is not divisible by 2, 5
- We do not need to factor $\phi(n)$ to get e
- Just verify: $\gcd(\phi(n), e) = 1$ (Euclidean algorithm)
- Assume: $e = 7$ (public key)
- Extended Euclidean algorithm $\Rightarrow e^{-1} = ?? \bmod 40$
- Secret exponent key: 23
- other pares: $e=3, e^{-1}=??$ $e=9, e^{-1}=??$ $e=11, e^{-1}=??$
 $e=13, e^{-1}=??$ $e=17, e^{-1}=??$ $e=19, e^{-1}=??$
- $Z_{40}^* = \{1, 3, 7, 9, 11, 13, 17, 19, 21, 23, 27, 29, 31, 33, 37, 39\}$
- $e=3, e^{-1}=27$ $e=13, e^{-1}=37$ $e=17, e^{-1}=33$
 $e^{-1}=e^{-1} = \{9, 11, 19, 21, 29, 31, 39\}$

11%

RSA idea....Example

- $p = 101, q = 113 \rightarrow n = 11413$
- $\phi(n) = 100 \times 112 = 11200 = 2^5 \times 5^2 \times 7$
- an integer e can be used as an encryption exponent if and only if e is not divisible by 2, 5 or 7
- We do not need to factor $\phi(n)$ to get e
- Just verify: $\gcd(\phi(n), e) = 1$ (Euclidean algorithm)
- Assume: $e = 3533$ (public key)
- Extended Euclidean algorithm $\Rightarrow e^{-1} = 6597 \bmod 11200$
- Secret exponent key: 6597

11%

Some notes about e, d, p, and q

- p and q must be large for security
- e , the encryption exponent, does not have to be that large ($2^{16} - 1 = 65535$ is good)
- d , the decryption exponent, needs to be sufficiently large (512 to 2048 bits)
- Having to work with such large numbers, we need to look at some other elements of RSA.

11%

RSA: Component Operations

- Factorization
 - Believed to be difficult (security is here)
- Exponentiation
 - We need to do it fast
- Generating prime numbers
 - Mersenne Primes
 - Fermat Primes
- Testing primality
 - Fermat Test
 - Square Root test
 - Miller-Rabin test
- http://mathworld.wolfram.com/news/2002-08-07_primetest/
- <http://www.cse.iitk.ac.in/primality.pdf>

11%

Some Number Theory

11%

Factorization

- Brute force is stupid and slow
 - $d = 1, 2, 3, 4, \dots$ Does d divide n ?
 - Factoring $n = pq$. If $p \leq q$, $n \geq p^2$, so $\sqrt{n} \geq p$
 - d can go high as \sqrt{n} in worst case
 - For $n \sim 10^{40}$, 10^{20} number of divisions
- Use structure of Z_n
 - $p-1$ method (not really used, but a good speedup)
 - Pollard's rho method
 - Quadratic sieve, Number Field Sieve (NFS)
 - Is there a better method out there?

10%

Prime Numbers

- **prime number p :** $p > 1$ and divisible only by 1
- **composite number:** integer not prime

Prime Number Theorem:

- # of primes in positive integer $x = x / \ln x$
- for $x=10^{10}$, # of primes = 434,294,481

Theorem: Every positive integer is a product of primes. This factorization is unique.

- If p is a prime and it divides a product of integers $a \cdot b$
- then either $p \mid a$ or $p \mid b$.

11%

Z_n^*

- Z_n is a ring for any positive integer n
- $b \in Z_n$
- When b^{-1} exist?
- b^{-1} exist if and only if $\gcd(b, n) = 1$
- Z_n^* is a ring with elements relatively prime to n
- Z_n^* has all elements with *multiplicative inverses*
- $|Z_n^*| = \text{order of } Z_n^* = \text{number of elements}$
- Z_n^* is closed under multiplication
 - $x, y \in Z_n^*$ (x, y are relatively prime to n)
 - $x \cdot y$ is relatively prime to n

11%

Integers: $a > 0$ & $p \in \text{prime}$

(i) (Fermat's little theorem) ~1600s

If $\gcd(a, p) = 1$, then
 $a^p = a \pmod{p}$
 $a^{p-1} = 1 \pmod{p}$

(ii) (Euler's theorem) ~1700s

If $r = s \pmod{p-1}$, then $a^r = a^s \pmod{p}$
 when working modulo a prime p , exponents can be reduced modulo $p-1$.

If $\gcd(a, n)=1$, then $a^{\phi(n)} \equiv 1 \pmod{n}$
 where $\phi(n)$ is defined as the number of integers $1 \leq a \leq n$ such that $\gcd(a, n)=1$ and called as Euler's ϕ -function. $\rightarrow \phi(p) = (p-1)$

14%

Congruence Classes (analogy)

- Let a, b , and n be integers with $n \neq 0$. We say that
 - $\rightarrow a \equiv b \pmod{n}$ (a is congruent (equivalent) to $b \pmod{n}$)
 - \rightarrow if $a-b$ is a multiple of (positive or negative) n .
 - \rightarrow Thus, $a = b + k \cdot n$ for some integer k (positive or negative)

Proposition: a, b, c, d, n integers with $n \neq 0$
 and

$$a \equiv b \pmod{n} \text{ and } c \equiv d \pmod{n}.$$

Then

- ✓ $a + c \equiv b + d \pmod{n}$
- ✓ $a - c \equiv b - d \pmod{n}$
- ✓ $a \cdot c \equiv b \cdot d \pmod{n}$

15%

Division in Congruence Classes

We can divide by $a \pmod{n}$ when $\gcd(a, n)=1$

- Example: Solve $2x + 7 \equiv 3 \pmod{17}$
- Example: Solve $5x + 6 \equiv 13 \pmod{15}$.

Proposition: Suppose $\gcd(a, n)=1$.

- Let s and t be integers such that $a \cdot s + n \cdot t = 1$.
- Then $a \cdot s \equiv 1 \pmod{n}$
- s is called the *multiplicative inverse* of $a \pmod{n}$

Extended Euclidean algorithm is a fairly efficient method of computing multiplicative inverses in congruence classes.

17%


Is RSA really secure??

- RSA :
 - public key: (N, e) Encrypt: $C = M^e \pmod{N}$
 - private key: d Decrypt: $C^d = M \pmod{N}$
($M \in \mathbb{Z}_N^*$)
- Can RSA be an insecure cryptosystem???
- Many attacks exist.

Using RSA: What can go wrong?


- Computing $\phi(n)$ is no easier than factoring n
- From $n = pq$ and $\phi(n) = (p-1)(q-1)$, we obtain:
 - $p^2 - (n - \phi(n) + 1)p + n = 0$
 - The roots of the above equation will be p and q
- If the decryption exponent, a is known, Bob needs to choose a new decryption exponent.
 - That isn't enough! Bob must also choose a new modulus.

A simple attack on textbook RSA

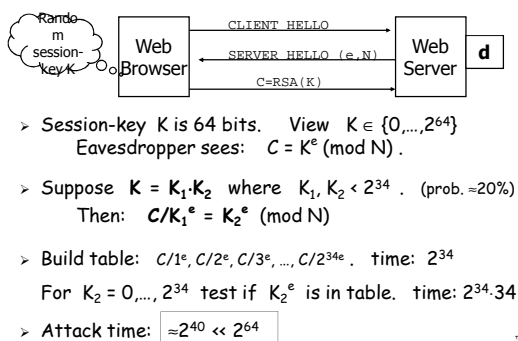

Common RSA encryption

- Never use textbook RSA.
- RSA in practice:

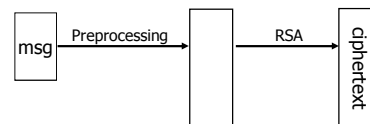


- Main question:
 - How should the preprocessing be done?
 - Can we argue about security of resulting system?

Attack on PKCS1

- Bleichenbacher 98. Chosen-ciphertext attack.
 - PKCS1 used in SSL:
-
- \Rightarrow attacker can test if 16 MSBs of plaintext = '02'.
- Attack: to decrypt a given ciphertext C do:
 - Pick random $r \in \mathbb{Z}_N$. Compute $C' = r^e \cdot C = (rM)^e$.
 - Send C' to web server and use response.

Chosen ciphertext security (CCS)

- No efficient attacker can win the following game: (with non-negligible advantage)

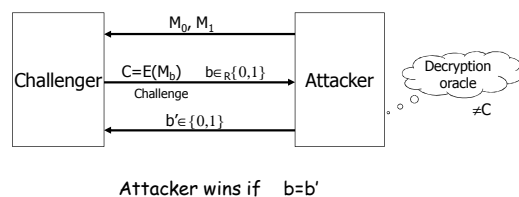

Is RSA a one-way permutation?

- To invert the RSA one-way function (without d) attacker must compute:

$$M \text{ from } C = M^e \pmod{N}.$$
- How hard is computing e 'th roots modulo N ??
- Best known algorithm:
 - Step 1: factor N . (hard)
 - Step 2: Find e 'th roots modulo p and q . (easy)

Shortcuts?

- Must one factor N in order to compute e 'th roots?
 Exists shortcut for breaking RSA without factoring?
- To prove no shortcut exists show a reduction:
 - Efficient algorithm for e 'th roots mod N
 \Rightarrow efficient algorithm for factoring N .
 - Oldest problem in public key cryptography.
- Evidence no reduction exists: (BV98)
 - "Algebraic" reduction \Rightarrow factoring is easy.
 - Unlike Diffie-Hellman (Maurer'94).

RSA With Low public exponent

- To speed up RSA encryption (and sig. verify) use a small e .

$$C = M^e \pmod{N}$$
- Minimal value: $e=3$ ($\gcd(e, \phi(N)) = 1$)
- Recommended value: $e=65537=2^{16}+1$
 Encryption: 17 mod. multiplies.
- Several weak attacks. Non known on RSA-OAEP.
- Asymmetry of RSA: fast enc. / slow dec.
 - ElGamal: approx. same time for both.

Implementation attacks

- Attack the implementation of RSA.
- Timing attack: (Kocher 97)
 The time it takes to compute $C^d \pmod{N}$ can expose d .
- Power attack: (Kocher 99)
 The power consumption of a smartcard while it is computing $C^d \pmod{N}$ can expose d .
- Faults attack: (BDL 97)
 A computer error during $C^d \pmod{N}$ can expose d .
 OpenSSL defense: check output. 5% slowdown.

DES vs. RSA

- RSA is about 1500 times slower than DES
 - Exponentiation and modulus
- Generation of numbers used in RSA can take time
- Test n against known methods of factoring
 - <http://www.rsasecurity.com/rsalabs/challenges/factoring/numbers.html>

Key lengths

- Security of public key system should be comparable to security of block cipher.

NIST:

<u>Cipher key-size</u>	<u>Modulus size</u>
≤ 64 bits	512 bits.
80 bits	1024 bits
128 bits	3072 bits.
256 bits (AES)	15360 bits

- High security \Rightarrow very large moduli.
 Not necessary with Elliptic Curve Cryptography.

key length for secure RSA

- key length for secure RSA transmission is typically 1024 bits. 512 bits is now no longer considered secure.
- For more security or if you are paranoid, use 2048 or even 4096
- With the faster computers available today, the time taken to encrypt and decrypt even with a 4096-bit modulus really isn't an issue anymore.
- In practice, it is still effectively impossible for you or I to crack a message encrypted with a 512-bit key.
- An organisation like the NSA who has the latest supercomputers can probably crack it by brute force in a reasonable time, if they choose to put their resources to work on it.
- The longer your information is needed to be kept secure, the longer the key you should use.

Key Distribution

- Then hard problem for symmetric (secret) key ciphers
- Transmitting a private key on an insecure channel
 - Asymmetric system solves problem

p & q generation recommendation

- To generate the primes p and q , generate a random number of bit length $b/2$ where b is the required bit length of n ;
- set the low bit (this ensures the number is odd) and set the two highest bits (this ensures that the high bit of n is also set);
- check if prime; if not, increment the number by two and check again. This is p .
- Repeat for q starting with an integer of length $b-b/2$.
- If $p < q$, swap p and q (this only matters if you intend using the CRT form of the private key).
- In the extremely unlikely event that $p = q$, check your random number generator.
- For greater security, instead of incrementing by 2, generate another random number each time.

e & d recommendation

- In practice, common choices for e are 3, 17 and 65537 ($2^{16}+1$).
- These are Fermat primes and are chosen because they make the modular exponentiation operation faster.
- Also, having chosen e , it is simpler to test whether $\gcd(e, p-1)=1$ and $\gcd(e, q-1)=1$ while generating and testing the primes.
- Values of p or q that fail this test can be rejected there and then.
- To compute the value for d , use the *Extended Euclidean Algorithm* to calculate $d = e^{-1} \bmod \phi$ (this is known as *modular inversion*).